


TC-41 Bayonet thermocouples are flexible temperature sensors that offer easy installation and secure mounting, making them perfect for applications requiring reliable and consistent surface contact. They are equipped with a spring-loaded bayonet cap that maintains constant pressure against the measurement surface, ensuring accurate and stable temperature readings.

Key Feature:

- Available in type J, K, T .
- Adjustable depth bayonet twist lock with spring compression.
- A wide selection of sheath material to suit application requirement, 304ss, 316ss etc.
- Sheath diameter is available from 0.125" to 0.250".
- Grounded, Ungrounded junction to suite application requirement.
- Available with low temp and high temp connectors.
- Available in IEC 60584 & ANSI MC 96.1 standard tolerances.

Thermocouple Junction options for TC41



Ungrounded Junction: Junction is similar to grounded junction except wire are fuse welded, which is then insulated with Mgo powder and formed cap by welding without incorporating thermocouple wires. Thus, the junction is called the ungrounded junction.

Key Benefits :


- Wires are protected from any mechanical damage
- Offers rugged construction, the same as the grounded junction.
- Strain due to differential expansion between wire and sheath is minimized with insulated wires.



Grounded Junction: In grounded junction thermocouple wires and sheath of the mineral insulated cable is welded together to form a junction. Thermocouple wires and sheath becomes an integral part of the junction. Thus, the wire is grounded to the sheath.

Key Benefits:

- Slower response than Exposed junction, but offers rugged construction.
- Can hold higher pressure than exposed junction and Ungrounded junction.

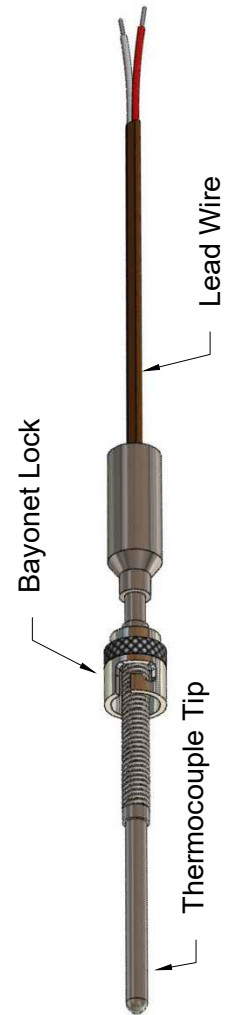

Suggested Maximum Temperature Limit

Thermocouple Type	°C (F)	°C (F)	°C (F)
Probe OD	1/8"	3/16"	1/4"
T	315 (600)	370 (700)	370 (700)
J	520 (970)	620(1150)	720 (1330)
K	520 (970)	1150 (2100)	1150 (2100)

The suggested maximum temperature limit is based on information available in the ASTM standard and test performed in our facility. The maximum temperature limit may change based on the type of process and material/ liquid it is going to be used in. These limits apply to protected thermocouples.

Response Time

Thermocouple OD	Junction		
	Exposed	Grounded	Ungrounded
1/25"	0.005	0.1	0.3
1/16"	0.02	0.2	0.5
1/8"	0.03	0.7	1.3
3/16"	0.07	1.1	2.2
1/4"	0.1	2.2	4.5
3/8"	0.9	2.7	7.5





Response time is measured in liquid by inserting thermocouple into the temperature-controlled circulating bath. Time taken to reach 63.2% of a step temperature change is noted as the response time of thermocouple. For a fast response, the exposed tip is recommended, but the exposed junction is not as rugged as ungrounded and grounded junctions for industrial use.

Temperature Accuracy As per ASTM E608/608M/ IEC 60584 & ANSI MC 96.1 standard tolerances



Type	Temperature	Standard Limit	Special Limit
T	-200 °C to 0 °C	± 1 °C or 1.5% Whichever is greater	N/A
	0 °C to 350 °C	± 1 °C or .75% Whichever is greater	± 0.5 °C or 0.4% Whichever is greater
J	0 °C to 750 °C	± 2.2 °C or .75% Whichever is greater	± 1.1 °C or 0.4% Whichever is greater
	-200 °C to 0 °C	± 1.7 °C or 1.0% Whichever is greater	N/A
E	0 °C to 900 °C	± 1.7 °C or .5% Whichever is greater	± 1 °C or 0.4% Whichever is greater
	-200 °C to 0 °C	± 2.2 °C or 2.0 % Whichever is greater	N/A
KORN	0 °C to 1250 °C	± 2.2 °C or .75% Whichever is greater	± 1.0 °C or 0.4% Whichever is greater
	-200 °C to 0 °C	± 2.2 °C or 2.0 % Whichever is greater	N/A

Notes:


- All the thermocouples are manufactured as ASTM E608/608M
- Calibration is available as per ASTM E220 on request

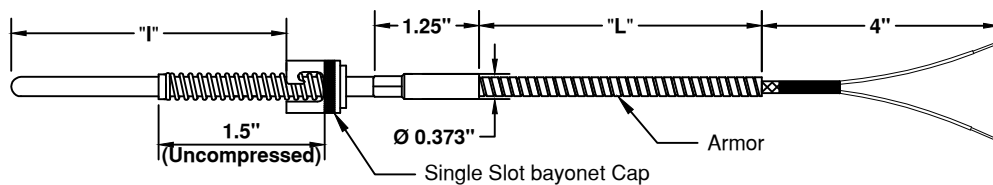

Termination Options-

Standard
Connector

Mini Connector

Mini Connector with
BracketStandard Connector with
BracketStandard Duplex
Connector

Mini Duplex Connector

Notes:

1. Maximum Compression 1".

	1	2	3	4	5	6	7	8	9	10	11	12	13
TC41													

For Example- TC41-J-G-0-TW-3-8-6i-24i-2X-STP-0-0-0

1. THERMOCOUPLE TYPE

CODE	
J	Iron(+) vs Constantan(-)
K	Chromel(+) vs Alumel(-)
T	Copper(+) vs Constantan(-)
Use "S" for Special limit of Error	

2. MEASURING JUNCTION

CODE	
G	Simplex / Grounded Junction
UG	Simplex / Un- Grounded Junction
DG	Duplex / Grounded
DUG	Duplex / Un-Grounded

3. PROBE ANGLE

CODE	
0	Straight
45	45° ANGLE
90	90° ANGLE

4. PROBE CONSTRUCTION

CODE	
MGO	Magnesium Oxide
TW	Tube and wire
NOTE:- Duplex junction in tube and wire is not available with 1/8" and 3mm OD	

5. SHEATH OD

CODE	IMPERIAL SIZE	METRIC SIZE
2	1/8"	3.2 mm
3	3/16"	4.76 mm
4	1/4"	6.35 mm
2M	0.079	3.0mm
3M	0.197"	5.0mm
4M	0.236"	6.0 mm

6. SHEATH MAT.

CODE	
8	SS 316
4	SS 310
9	SS 304
6	SS 321
3	INCONEL 600

7. IMMERSION LENGTH (I)

Immersion length - use "I" for inches and "M" for millimetre

8. LEAD LENGTH (L)

Lead length - use "I" for inches and "M" for millimetre

9. WIRE TYPE

CODE	
1	PVC (105° C)
2	TEFLON (205° C)
6	TEFLON (260° C)
3	FIBRE GLASS (510° C)
4	High Temp Fiberglass (704° C)
NOTE:- Add "O" for no jacketing. Add "X" for SS braiding & "Z" for Armor	

10. CODES FOR TERMINATION

CODE	
Z	Bare ends
STP	Standard Plug
MP	Miniature Plug
HTP	High Temperature Plug
UTP	Ultra Temperature Plug

11. CODES FOR TERMINATION (JACK)

CODE	
0	Not required
STJ	Standard Jack
MJ	Miniature Jack
HTJ	High Temperature Jack
UTJ	Ultra Temperature Jack

12. OPTIONAL ACCESSORY

CODE	
0	Not required
02	Strain relief spring (Only for lead wire without Armour)

13. OPTIONAL ACCESSORY

CODE	
0	Not required
WC	Wire clamp
Only choose when ordering with connector	