


TC14 is direct immersion type MGO packed Thermocouple for Various applications in process temperature measurement. Mgo Packed thermocouples are rigid in construction, can be used in temperature applications in harsh environments. It comes with welded threaded fitting for easy and liquid tight installation into the process.

Key Feature:

- Available in type J, K, E, N, T .
- A wide selection of sheath material to suit application requirement, 304ss, 316ss, 321ss, Inconel® 600, Incolloy 800, Monel, Pyrosil D etc.
- Sheath diameter is available from 0.040" to 0.375".
- Grounded, Ungrounded and Exposed junction to suite application requirement.
- Available with low temp and high temp connectors.
- Available in IEC 60584 & ANSI MC 96.1 standard tolerances

Thermocouple Junction options for TC14



Ungrounded Junction: Junction is similar to grounded junction except wire are fuse welded, which is then insulated with Mgo powder and formed cap by welding without incorporating thermocouple wires. Thus, the junction is called the ungrounded junction.

Key Benefits :


- Wires are protected from any mechanical damage
- Offers rugged construction, the same as the grounded junction.
- Strain due to differential expansion between wire and sheath is minimized with insulated wires.



Grounded Junction: In grounded junction thermocouple wires and sheath of the mineral insulated cable is welded together to form a junction. Thermocouple wires and sheath becomes an integral part of the junction. Thus, the wire is grounded to the sheath.

Key Benefits:


- Slower response than Exposed junction, but offers rugged construction.
- Can hold higher pressure than exposed junction and Ungrounded junction.



Exposed Junction: In expose junction, the sheath is removed, and thermocouple wires fuse-welded to form a junction. Tip of the MI cable is sealed with high temperature cement to protect MGO from contamination.

Key Benefits:

- Fast response time due to the less mass.

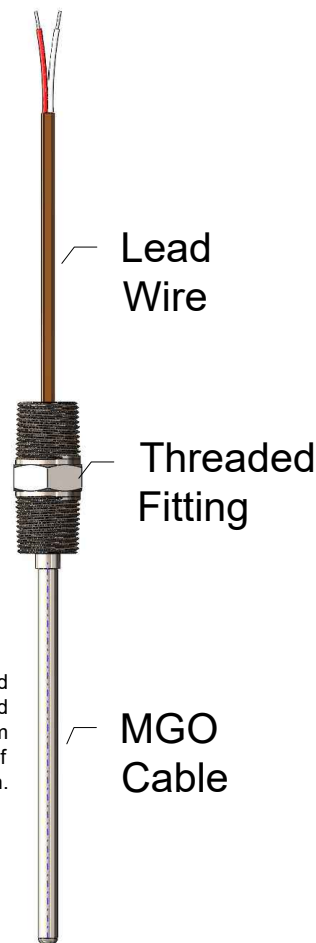

Suggested Maximum Temperature Limit As per ASTM E608/608M

Thermocouple Type	°C (F)	°C (F)	°C (F)	°C (F)	°C (F)	°C (F)
OD	1/25"	1/16"	1/8"	3/16"	1/4"	3/8"
T	260(500)	260(500)	315(600)	370 (700)	370 (700)	370 (700)
J	260 (500)	440(825)	520 (970)	620(1150)	720 (1330)	720 (1330)
K	700(1290)	920 (1690)	1070 (1960)	1150 (2100)	1150 (2100)	1150 (2100)
E	300(570)	510(950)	650 (1200)	730 (1350)	820(1510)	820(1510)

The suggested maximum temperature limit is based on information available in the ASTM standard and test performed in our facility. The maximum temperature limit may change based on the type of process and material/ liquid it is going to be used in. These limits apply to protected thermocouples.

Response Time

Thermocouple OD	Junction		
	Exposed	Grounded	Ungrounded
1/25"	0.005	0.1	0.3
1/16"	0.02	0.2	0.5
1/8"	0.03	0.7	1.3
3/16"	0.07	1.1	2.2
1/4"	0.1	2.2	4.5
3/8"	0.9	2.7	7.5



Response time is measured in liquid by inserting thermocouple into the temperature-controlled circulating bath. Time taken to reach 63.2% of a step temperature change is noted as the response time of thermocouple. For a fast response, the exposed tip is recommended, but the exposed junction is not as rugged as ungrounded and grounded junctions for industrial use.

Temperature Accuracy As per ASTM E608/608M/ IEC 60584 & ANSI MC 96.1 standard tolerances


Type	Temperature	Standard Limit	Special Limit
T	-200 °C to 0 °C	± 1 °C or 1.5% Whichever is greater	N/A
	0 °C to 350 °C	± 1 °C or .75% Whichever is greater	± 0.5 °C or 0.4% Whichever is greater
J	0 °C to 750 °C	± 2.2 °C or .75% Whichever is greater	± 1.1 °C or 0.4% Whichever is greater
	-200 °C to 0 °C	± 1.7 °C or 1.0% Whichever is greater	N/A
E	0 °C to 900 °C	± 1.7 °C or .5% Whichever is greater	± 1 °C or 0.4% Whichever is greater
	-200 °C to 0 °C	± 2.2 °C or 2.0 % Whichever is greater	N/A
KORN	0 °C to 1250 °C	± 2.2 °C or .75% Whichever is greater	± 1.0 °C or 0.4% Whichever is greater
	-200 °C to 0 °C	± 2.2 °C or 2.0 % Whichever is greater	N/A

Notes:

- All the thermocouples are manufactured as ASTM E608/608M
- Calibration is available as per ASTM E220 on request





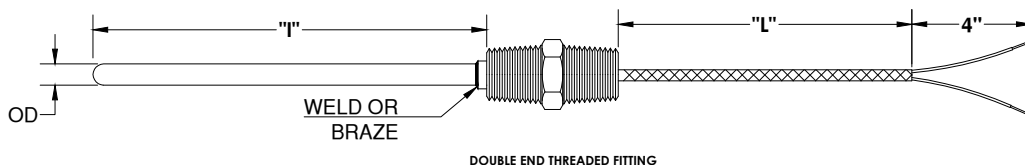


SINGLE ENDED



SINGLE ENDED ON INSTRUMENT SIDE


Termination Options-

Standard
ConnectorStandard Duplex
ConnectorStandard Connector
with BracketMini Connector with
Bracket

Mini Connector



Mini Duplex Connector



WITH ARMOR



STRAIN RELIEF SPRING

	1	2	3	4	5	6	7	8	9	10	11	12
TC14												

For Example- TC14-K-UG-3-8-12i-48i-02S8N-3-STP-0-0-BT

1. THERMOCOUPLE TYPE

CODE	
J	Iron(+) vs Constantan(-)
K	Chromel(+) vs Alumel(-)
T	Copper(+) vs Constantan(-)
E	Chromel(+) vs Constantan(-)
N	Nicrosil(+) vs Nisil(-)
Use "S" for Special limit of Error	

2. MEASURING JUNCTION

CODE	
G	Simplex / Grounded Junction
UG	Simplex / Un- Grounded Junction
E	Simplex / Exposed
DG	Duplex / Grounded
DUG	Duplex / Un-Grounded
DE	Duplex/ Exposed

3.SHEATH OD

CODE	IMPERIAL SIZE	METRIC SIZE
1	1/16"	1.5 mm
2	1/8"	3.2 mm
3	3/16"	4.76 mm
4	1/4"	6.35 mm
5	5/16"	7.9mm
6	3/8"	9.5 mm
7	0.215"	5.46 mm
2M	0.079"	3.0mm
3M	0.197"	5.0mm
4M	0.236"	6.0 mm
5M	0.315"	8.0mm
6M	0.354"	9.0 mm
7M	0.394"	10.0 mm

4. SHEATH MAT.

CODE	
8	SS 316
4	SS 310
9	SS 304
6	SS 321
3	INCONEL 600
5	SS 446
10	INCONEL 800

5. IMMERSION LENGTH (I)

Immersion length - use "I" for inches and "M" for millimetre

6. LEAD LENGTH (L)

Lead length - use "I" for inches and "M" for millimetre

7. PROCESS FITTING

CODE	
7-1. STYLE	
01	Single ended
02	Double ended
03	Single ended on instrument side
7-2. MATERIAL	
S	Stainless Steel
M	Mild Steel
7-3. SIZE	
2	1/8"
4	1/4"
6	3/8"
8	1/2"
18	M18 X 1.5
20	M20 X 1.5
7-4. THREAD TYPE	
N	NPT
B	BSP
Leave blank for metric thread	

8. WIRE TYPE

CODE	
1	PVC (105° C)
2	TEFLON (205° C)
6	TEFLON (260° C)
3	FIBRE GLASS (510° C)
4	High Temp Fiberglass (704° C)
NOTE:- Add "O" for no jacketing. Add "X" for SS braiding & "Z" for Armor	

9. CODES FOR TERMINATION

CODE	
Z	Bare ends
STP	Standard Plug
MP	Miniature Plug
HTP	High Temperature Plug
UTP	Ultra Temperature Plug
SCP	Standard Ceramic Plug

10. CODES FOR TERMINATION (JACK)

CODE	
0	Not required
STJ	Standard Jack
MJ	Miniature Jack
HTJ	High Temperature Jack
UTJ	Ultra Temperature Jack
SCJ	Standard Ceramic Jack

11. OPTIONAL ACCESSORY

CODE	
0	Not required
02	Strain relief spring (Only for lead wire without Armour)

12. OPTIONAL ACCESSORY

CODE	
0	Not required
WC	Wire clamp
BT	Silicon rubber boot for connector
Only choose when ordering with connector	